# CANOpen

# GDHF-CA02




Wuhan Guide Technology Co.,Ltd.

. . . . . 1

. . . . . 1

. . . . . 1

. . . . . 3

. . . . . 3

. . . . . 3

. . . . . 3

. . . . . 5

. . . . . 5

CANOpen . . . . . 5

GDHF-CA02 . . . . . 7

. . . . . 8

. . . . . 8

. . . . . 8

. . . . . 9

. . . . . 9

. . . . . 10

. . . . . 10

.....10

CANOpen ..... 11

.....12

.....12

.....12

CANOpen ..... 12

.....15

.....15

CANOpen .....15

COB-ID .....15

Canopen ..... 16

.....21

LED ..... 21

.....22

CANOpen

GDHF-CA02

!

GDHF-CA02

CANOpen

GDHF-CA02

CANOpen

GDHF-CA02 LED

CANOpen

CANOpen

# CANOpen

CANOpen CAN CANOpen

GDHF-CA02 CANOpen

CAN Controller Area Network

1 ISO11898-2 2

ISO11898-1

Software

Firmware

CAN

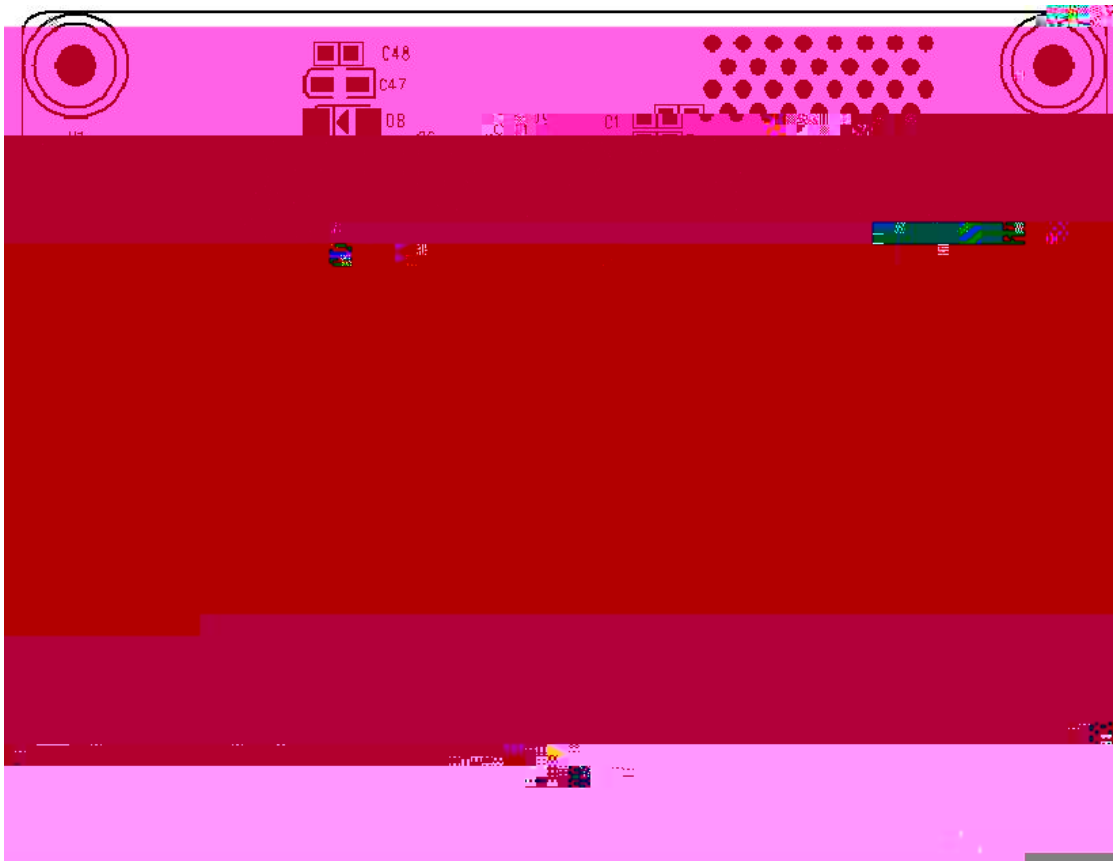
CAN

CAN

CAN 11/29 8

CAN

# GDHF-CA02




1 GDHF-CA02

CANOpen GDHF-CA02

CANOpen CANOpen

CANOpen GDHF-CA02

- 
- 
- PID
- 

- 
- 

CANOpen GDHF-CA02

J14

CANOpen GDHF-CA02

- HF600
- CANOpen

CANOpen GDHF-CA02

- CANOpen GDHF-CA02
- 2 M3X8
- 

! 5

GDHF-CA02 2 J14

GDHF-CA02 PC

GDHF-CA02

- GDHF-CA02 PC

  &
- 2 M3X8 GDHF-CA02 PC
-

EMC GDHF-CA02

CAN



- 
- CANOpen

5

حي

# CANOpen

GDHF-CA02 J9 CAN1 CAN2

| | |
|---|---|
| CANH1 | CAN 1 CAN_H |
| CANL1 | CAN 1 CAN_L |
| PE | |
| CANH2 | CAN 2 CAN_H |
| CANL2 | CAN 2 CAN_L |
| PE | |

A

B

CANOpen 5E

TIA/EIA-568-B

CANOpen

CANOpen GDHF-CA02

CANOpen

GDHF-CA02

(EDS)

http://www.guide-electric.com EDS

GD_CanOpenCard.eds

## CANOpen

GDHF-CA02

CANOpen

1 CANOpen

| | | | | |
|---|---|---|---|---|
| | | | | |
| P31.0 | CAN | [0]<br>[1] | 0 1 | 0 |
| P31.1 | CANopen<br>ID | CANopen ID | 1 127 | 0 |
| P31.2 | | CAN | | |
| P31.3 | CAN | | 0 60 | 0 |
| P31.4 | CAN | | | |

1. CANOpen

[0] CANOpen

[1] CANOpen

2. CANopen ID

CANOpen ID

3.

CAN 20Kbps ~

1000Kbps

4. CAN

0

5. CAN

4

CANOpen

## CANOpen

CANOpen GDHF-CA02

CANOpen

## COB-ID

| Hex | | | | |
|---|---|---|---|---|
| 1000 | 0 | RO | UNSIGNED32 | 0x0000 0000 |
| 1001 | 0 | RO | UNSIGNED8 | |
| 1003 | 0 | RW | UNSIGNED32 | |
| | 1 | | | |

| | | | | | |
|---|---|---|---|---|---|
| | 1 | COB-ID | RW | UNSIGNED32 | NodeID+0x500 |
| | 2 | | RW | UNSIGNED8 | 254 |
| | 3 | inhibit time | RW | UNSIGNED16 | 100 |
| | 5 | Eventtimer | RW | UNSIGNED16 | 0 |
| | | PDO1 RX | | | |
| | 0 | | RO | UNSIGNED8 | 4 |
| 1600 | 1 | | RO | UNSIGNED32 | |
| | 2 | | RO | UNSIGNED32 | |
| | 3 | | RO | UNSIGNED32 | |
| | 4 | | RO | UNSIGNED32 | |
| | | PDO2 RX | | | |
| | 0 | | RO | UNSIGNED8 | 4 |
| 1601 | 1 | | RO | UNSIGNED32 | |
| | 2 | | RO | UNSIGNED32 | |
| | 3 | | RO | UNSIGNED32 | |
| | 4 | | RO | UNSIGNED32 | |
| | | PDO3 RX | | | |
| | 0 | | RO | UNSIGNED8 | 4 |
| 1602 | 1 | | RO | UNSIGNED32 | |
| | 2 | | RO | UNSIGNED32 | |
| | 3 | | RO | UNSIGNED32 | |
| | 4 | | RO | UNSIGNED32 | |
| | | PDO4 RX | | | |
| | 0 | | RO | UNSIGNED8 | 4 |
| 1603 | 1 | | RO | UNSIGNED32 | |
| | 2 | | RO | UNSIGNED32 | |
| | 3 | | RO | UNSIGNED32 | |
| | 4 | | RO | UNSIGNED32 | |
| | | PDO1 TX | | | |
| | 0 | | RO | UNSIGNED8 | 5 |
| | 1 | COB-ID | RW | UNSIGNED32 | NodeID+0x180 |
| 1800 | 2 | | RW | UNSIGNED8 | 254 |
| | 3 | inhibit time | RW | UNSIGNED16 | 100 |
| | 5 | Eventtimer | RW | UNSIGNED16 | 0 |
| | 6 | SYNC start value | RW | UNSIGNED8 | 1 |
| | | PDO2 TX | | | |
| | 0 | | RO | UNSIGNED8 | 5 |
| | 1 | COB-ID | RW | UNSIGNED32 | NodeID+0x280 |
| 1801 | 2 | | RW | UNSIGNED8 | 254 |
| | 3 | inhibit time | RW | UNSIGNED16 | 100 |
| | 5 | Eventtimer | RW | UNSIGNED16 | 0 |
| | 6 | SYNC start value | RW | UNSIGNED8 | |

| | | | | | |
|---|---|---|---|---|---|
| | | PDO3 TX | | | |
| | 0 | | RO | UNSIGNED8 | 5 |
| | 1 | COB-ID | RW | UNSIGNED32 | NodeID+0x380 |
| 1802 | 2 | | RW | UNSIGNED8 | 254 |
| | 3 | inhibit time | RW | UNSIGNED16 | 100 |
| | 5 | Eventtimer | RW | UNSIGNED16 | 0 |
| | 6 | SYNC start value | RW | UNSIGNED8 | 1 |
| | | PDO4 TX | | | |
| | 0 | | RO | UNSIGNED8 | 5 |
| | 1 | | | | |
| 1803 | | | | | |

MODBUS




register_0 ×1

| | | | | |
|---|---|---|---|---|
| register_34 | | ×10 | R | |
| register_35 | _ @ | ×10 | R | |
| register_36 | (AFE) | ×10 | R | _ |
| register_37 | (AFE) | ×100 | R | |
| register_38 | | ×1 | R | N/A |
| register_39 | | ×1 | R | N/A |
| register_40 | | ×1 | R | N/A |
| register_41 | | ×10 | R | |
| register_42 | T1 | ×10 | R | |
| register_43 | T2 | ×10 | R | |
| register_44 | | ×1 | R | N/A |
| register_45 | @ ă Ů | | | |


# LED

GDHF-CA02 3 LED LED

LED

| LED | | |
|---|---|---|
|  |  |  |
| RUN | RX | TX |

| | | |
|---|---|---|
| RUN | | 10Hz<br>1Hz |
| RX | | |
| TX | | |

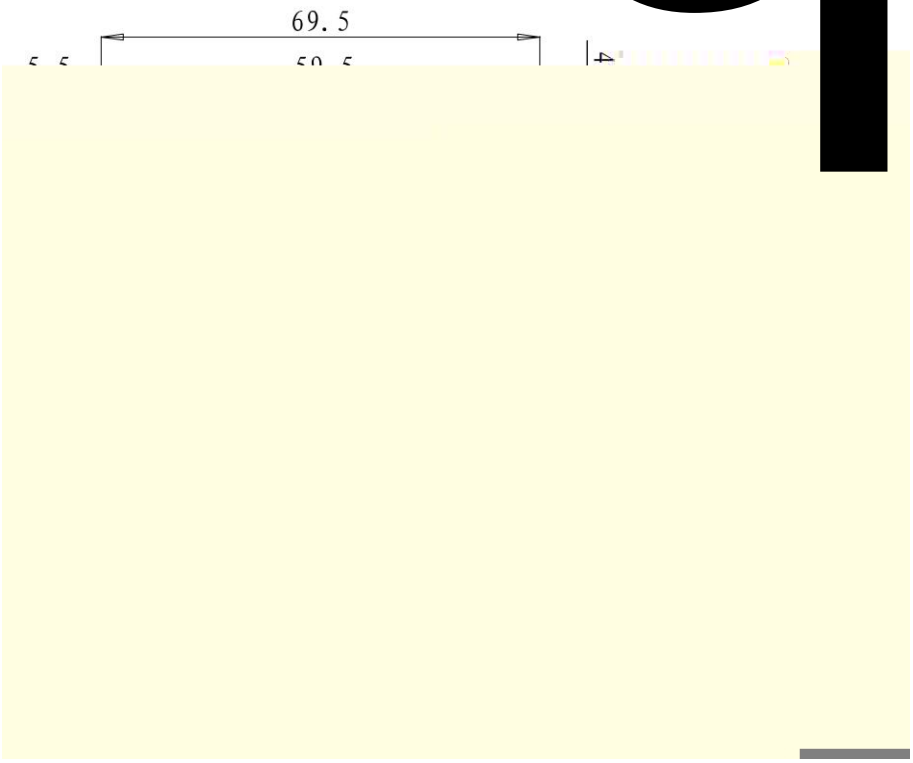


1 GDHF-CA02 mm